


Floor Plate

Floor Plate (Medium Pattern)

Size	Width	WT / SQ FT	WT / Sheets
16 ga.	48 x 96	3.000	96.00
16 ga.	48 x 120	3.000	120.00
14 ga.	48 x 96	3.750	120.00
14 ga.	48 x 120	3.750	150.00
14 ga.	60 x 120	3.750	187.50
12 ga.	48 x 96	5.250	168.00
12 ga.	48 x 120	5.250	210.00
12 ga.	60 x 96	5.250	210.00
12 ga.	60 x 120	5.250	262.50
12 ga.	60 x 144	5.250	315.00
12 ga.	60 x 240	5.250	525.00
1/8"	48 x 96	6.160	197.12
1/8"	48 x 120	6.160	246.40
1/8"	48 x 144	6.160	295.68
1/8"	60 x 96	6.160	246.40
1/8"	60 x 120	6.160	308.00
1/8"	60 x 144	6.160	369.60
1/8"	72 x 96	6.160	295.68
1/8"	72 x 120	6.160	369.60
1/8"	72 x 144	6.160	443.52

Floor Plate – A low carbon product with raised lugs in a cross hatch pattern which provides better traction for driving or walking. Conforms to ASTM A-786. Thickness does not include projections.

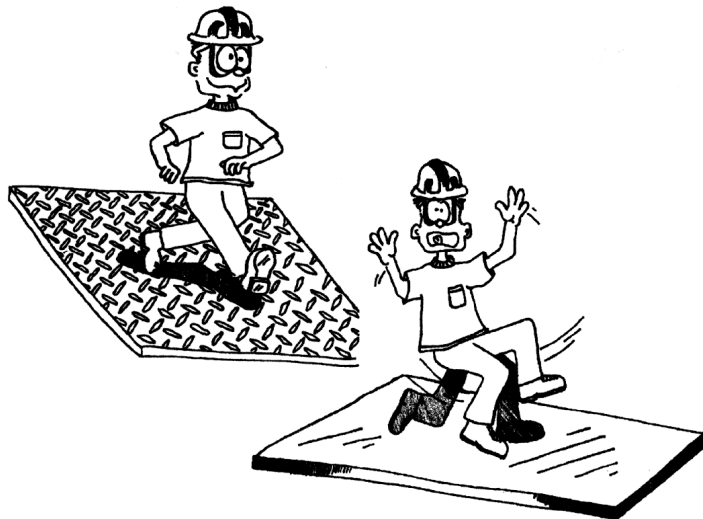


Floor Plate (Medium Pattern)

Size	Width	WT / SQ FT	WT / Sheets
3/16"	48 x 96	8.710	278.72
3/16"	48 x 120	8.710	348.40
3/16"	48 x 144	8.710	418.08
3/16"	60 x 96	8.710	348.40
3/16"	60 x 120	8.710	435.50
3/16"	60 x 144	8.710	522.60
3/16"	72 x 96	8.710	418.08
3/16"	72 x 120	8.710	522.60
1/4"	48 x 96	11.260	360.32
1/4"	48 x 120	11.260	450.40
1/4"	60 x 96	11.260	450.40
1/4"	60 x 120	11.260	563.00
1/4"	60 x 144	11.260	675.60
1/4"	72 x 120	11.260	675.60
3/8"	48 x 96	16.370	523.84
3/8"	48 x 120	16.370	654.80
3/8"	60 x 96	16.370	654.80
3/8"	60 x 120	16.370	818.50

Abrasion Resisting Sheet & Plate

Size	Width	WT / SQ FT	WT / Sheet
10 ga.	48 x 120	5.625	225.00
3/16"	48 x 120	7.660	306.40
3/16"	60 x 120	7.660	383.00
1/4"	48 x 120	10.210	408.40
1/4"	60 x 120	10.210	510.50
3/8"	48 x 120	15.320	612.80
3/8"	60 x 120	15.320	766.00

AR MED Sheet and Plate – This abrasion resisting product is medium carbon, high manganese, and has a Brinell Hardness typically in the range of 200/250. This material is produced primarily for use in the materials-handling industry such as sideboards and guides on conveyors, chutes, hoppers and mixer drums. Can be welded, machined, drilled, punched, and takes a moderate amount of forming and rolling.



Aluminum Plates 3003-H14

Decimal	Size	WT / SQ FT	WT / Sheet
0.250	48 x 96	3.564	114.05
0.250	48 x 120	3.564	142.56



Aluminum Sheet Color/Painted

White on White GPSH14

Decimal	Size	WT / SQ FT	WT / Sheet
0.040	48 x 96	0.585	18.72
0.040	48 x 120	0.585	23.40
0.040	49 x 144	0.585	28.66



White / Black Coat GPSH14BL

Decimal	Size	WT / SQ FT	WT / Sheet
0.040	48 x 96	0.585	18.72
0.040	48 X 144	0.585	28.08



Bronze GPSH14B

Decimal	Size	WT / SQ FT	WT / Sheet
0.040	48 X 96	0.585	18.72
0.040	48 X 120	0.585	23.40

Aluminum Diamond Tread Plate



3003 H22 Bright Finish

Decimal	Size	WT / SQ FT	WT / Sheet
0.0625	48 X 96	1.009	32.29
0.1000	48 X 192	1.570	100.48
0.125	48 X 96	1.925	61.60
0.125	48 X 120	1.925	77.00
0.125	48 X 192	1.925	123.20
0.125	60 X 96	1.925	77.00
0.125	60 X 192	1.925	154.00
0.1875	48 X 96	2.823	90.34
0.1875	48 X 120	2.823	112.92
0.1875	48 X 192	2.823	180.67
0.1875	60 X 144	2.823	169.38
0.1875	60 X 192	2.823	225.84



Aluminum Diamond Tread Plate
6061 T6 Mill Finish

Decimal	Size	WT / SQ FT	WT / Sheet
0.250	48 x 96	3.669	117.41
0.250	48 x 192	3.669	234.82
0.250	60 x 96	3.669	146.76
0.250	60 x 192	3.669	293.52
0.375	48 x 96	5.443	174.18
0.375	48 x 192	5.443	348.35

Heat-Treatable Alloys

Grade 6061 – This is the most adaptable of the heat-treatable aluminum alloys. 6061 is mostly used for structural applications. It has the majority of the good properties of aluminum and it extends a wide span of mechanical characteristics and corrosion resistance. It is weldable by all methods. Some common uses are truck frames, boat trailers and machine parts. Conforms to ASTM-B209.