

---

# Mission Statement

State Steel strives to provide quality products and services at competitive prices. This commitment is demonstrated with several branch locations all offering large, diverse inventories and state-of-the-art equipment which make our products and services readily available throughout our sales area. We are sensitive to customer needs and determined to find ways to meet or exceed their requirements.

Through hard work, good customer relations, and sound management we are committed to the future growth of State Steel, to our customers, and to our dedicated employees, the backbone of our success.

---

## Sioux City, IA

800-831-0862

712-277-4000

Fax: 712-277-3306

## Grand Island, NE

800-658-4352

308-381-2040

Fax: 308-381-1613

## Sioux Falls, SD

800-658-5522

605-338-9303

Fax: 605-338-6869

## Des Moines, IA

800-783-3590

515-264-0000

Fax: 515-264-9345

## Spencer, IA

800-747-9559

712-262-5609

Fax: 712-264-9268

## Omaha, NE

800-898-4523

402-894-1900

Fax: 402-894-1910



# State Steel Supply Company

*a full service supply center offering a wide range of services including:*


- **In-Line Temper Mill** (Cold Reduction Process)  
Cut to Length Coil Processing  
Up to 1/2" thick (100,000 yield) x 96" Wide  
with Improved Surface and Superior Flatness
- **Laser Cutting**  
3/4" thick - 80" x 216" production output
- **Shearing**
- **Forming**
- **Flame and Plasma Cutting**
- **CNC Saw Cutting**
- **Die Stamping** (Up to 200 ton Capacity)
- **Just in Time Delivery**

We also offer a full-line inventory (carbon, galvanized, stainless, aluminum) including pipe, tubing, DOM, threaded rod, expanded metal, bar grating, and grip strut.


























**[www.statesteel.com](http://www.statesteel.com)**

ISO 9002 CERTIFIED












# Index

<p><b>Aluminum</b></p> <p> Angle ..... 72</p> <p> Beams ..... 72</p> <p> Channel ..... 72</p> <p> Color / Painted ..... 77</p> <p> Expanded Metal ..... 73</p> <p> Flats ..... 74</p> <p> Pipe ..... 75</p> <p> Plates ..... 76-77</p> <p> Rounds ..... 73</p> <p> Sheets ..... 76</p> <p> Square &amp; Rectangle Tube ..... 73</p> <p> Square ..... 73</p> <p> Treadbrite (Floor Plate) ..... 77</p>	<p> <b>Channel</b></p> <p>Bar ..... 3</p> <p>Galvanized ..... 4</p> <p>Junior ..... 4</p> <p>Structural ..... 3-4</p> <hr/> <p> <b>Coil</b></p> <p>Cold Rolled ..... 36</p> <p>Floor Plate ..... 36</p> <p>Galvanized ..... 36</p> <p>Galvannealed ..... 36</p> <p>High Strength ..... 37</p> <p>Hot Rolled ..... 35</p> <p>Hot Rolled Pickled &amp; Oiled ..... 35</p> <hr/> <p> <b>Expanded Metal</b></p> <p>Flattened ..... 61</p> <p>Standard ..... 62</p> <hr/> <p> <b>Flats</b></p> <p>Cold Drawn ..... 19-20</p> <p>Galvanized ..... 11</p> <p>Hot Rolled ..... 9-11</p> <hr/> <p> <b>Floor Plates</b></p> <p>Aluminum ..... 77</p> <p>Carbon Steel ..... 31</p>
<p> <b>Angles</b></p> <p>Structural ..... 5-6</p> <p>Galvanized ..... 7</p>	
<p><b>Beams</b></p> <p> I Beams ..... 1</p> <p> Wide Flange Beams ..... 1-2</p>	
<p> <b>Beef Rail (Round Edge)</b></p> <p>Carbon 1045 ..... 12</p> <p>Galvanized ..... 12</p>	

# Index

<p> <b>Grader Blades</b> ..... 12</p> <p> <b>Grating</b></p> <p style="padding-left: 20px;">Bar ..... 64</p> <p style="padding-left: 20px;">Cat Walk ..... 64</p> <p style="text-align: center;"><b>Grip Strut</b> ..... 65</p> <p> <b>Hexagons</b></p> <p style="padding-left: 20px;">Cold Rolled ..... 18</p> <p style="padding-left: 20px;">Stress Relieved ..... 18</p> <p> <b>Pipe</b> ..... 39</p> <p> <b>Plates</b></p> <p style="padding-left: 20px;">Abrasion Resisting ..... 31</p> <p style="padding-left: 20px;">Aluminum ..... 76</p> <p style="padding-left: 20px;">High Strength ..... 32-33</p> <p style="padding-left: 20px;">Hot Rolled ..... 28-30</p> <p style="padding-left: 20px;">Pickled &amp; Oiled ..... 24</p> <p style="padding-left: 20px;">Stainless Annealed &amp; Pickled ..... 71</p> <p> <b>PTO Tube/Shaft</b> ..... 44</p> <p> <b>Rebar</b> ..... 14</p> <p> <b>Redi Rod</b></p> <p style="padding-left: 20px;">Carbon Steel Rod Oil Finish ..... 15</p> <p style="padding-left: 20px;">Electro Zinc Plated ..... 15</p> <p style="padding-left: 20px;">Stainless ..... 15</p>	<p> <b>Rounds</b></p> <p style="padding-left: 20px;">Cold Rolled ..... 16-17</p> <p style="padding-left: 20px;">Galvanized ..... 13</p> <p style="padding-left: 20px;">Hot Rolled ..... 13</p> <p style="padding-left: 20px;">Stainless ..... 66</p> <p style="padding-left: 20px;">Turned Ground and Polished ..... 17</p> <p style="text-align: center;"><b>Stainless</b></p> <p> Angle ..... 66</p> <p> Annealed &amp; Pickled Plates ..... 71</p> <p> Annealed &amp; Pickled Sheets ..... 70</p> <p> Channel ..... 66</p> <p> Expanded Metal ..... 69</p> <p> Flats ..... 67</p> <p> Pipe ..... 68</p> <p> Plates ..... 71</p> <p> Polished Sheets ..... 70</p> <p> Rectangle Tubing ..... 69</p> <p> Redi Rod ..... 15</p> <p> Round ..... 66</p> <p> Sheets ..... 70</p> <p> Square Tubing ..... 69</p> <p> Squares ..... 66</p> <p> Strips ..... 67</p>
--	--

# Index

 <b>Sheets</b> Cold Rolled ..... 25 Galvanized ..... 26 Galvannealed ..... 27 High Strength ..... 32-33 Hot Rolled ..... 23-24 Paint Grip ..... 27 Pickled & Oiled ..... 24 Stainless ..... 70	 <b>Strips</b> Galvanized ..... 8 Hot Rolled ..... 8
 <b>Squares</b> Cold Rolled ..... 18 Hot Rolled ..... 13	 <b>T Iron</b> ..... 7
<b>Stress Relieved</b>  Cold Rolled Rounds ..... 17  Hexagons ..... 18  Turned Ground & Polished ..... 17	 <b>Tube</b> Pipe Size ..... 43 Power Take Off ..... 44  Rectangle ..... 41-42 Round Mechanical Electric Weld ..... 43 Round Mechanical ..... 46-60 Round ..... 45  Square ..... 40-41
	 <b>Wire Mesh</b> Rolls ..... 14 Sheets ..... 14
	<b>Wire (Blk Annealed)</b> ..... 14

AISI Carbon Steel Tolerance Ranges ..... 22
Carbon Pipe Schedules ..... 38
Decimal Conversion Table ..... 78
Fabrication ..... 81-85
Glossary of Terms ..... 79-80

## Floor Plate

### Floor Plate (Medium Pattern)

Size	Width	WT / SQ FT	WT / Sheets
16 ga.	48 x 96	3.000	96.00
16 ga.	48 x 120	3.000	120.00
14 ga.	48 x 96	3.750	120.00
14 ga.	48 x 120	3.750	150.00
14 ga.	60 x 120	3.750	187.50
12 ga.	48 x 96	5.250	168.00
12 ga.	48 x 120	5.250	210.00
12 ga.	60 x 96	5.250	210.00
12 ga.	60 x 120	5.250	262.50
12 ga.	60 x 144	5.250	315.00
12 ga.	60 x 240	5.250	525.00
1/8"	48 x 96	6.160	197.12
1/8"	48 x 120	6.160	246.40
1/8"	48 x 144	6.160	295.68
1/8"	60 x 96	6.160	246.40
1/8"	60 x 120	6.160	308.00
1/8"	60 x 144	6.160	369.60
1/8"	72 x 96	6.160	295.68
1/8"	72 x 120	6.160	369.60
1/8"	72 x 144	6.160	443.52


### Floor Plate (Medium Pattern)

Size	Width	WT / SQ FT	WT / Sheets
3/16"	48 x 96	8.710	278.72
3/16"	48 x 120	8.710	348.40
3/16"	48 x 144	8.710	418.08
3/16"	60 x 96	8.710	348.40
3/16"	60 x 120	8.710	435.50
3/16"	60 x 144	8.710	522.60
3/16"	72 x 96	8.710	418.08
3/16"	72 x 120	8.710	522.60
1/4"	48 x 96	11.260	360.32
1/4"	48 x 120	11.260	450.40
1/4"	60 x 96	11.260	450.40
1/4"	60 x 120	11.260	563.00
1/4"	60 x 144	11.260	675.60
1/4"	72 x 120	11.260	675.60
3/8"	48 x 96	16.370	523.84
3/8"	48 x 120	16.370	654.80
3/8"	60 x 96	16.370	654.80
3/8"	60 x 120	16.370	818.50

### Abrasion Resisting Sheet & Plate

Size	Width	WT / SQ FT	WT / Sheet
10 ga.	48 x 120	5.625	225.00
3/16"	48 x 120	7.660	306.40
3/16"	60 x 120	7.660	383.00
1/4"	48 x 120	10.210	408.40
1/4"	60 x 120	10.210	510.50
3/8"	48 x 120	15.320	612.80
3/8"	60 x 120	15.320	766.00

**Floor Plate** – A low carbon product with raised lugs in a cross hatch pattern which provides better traction for driving or walking. Conforms to ASTM A-786. Thickness does not include projections.

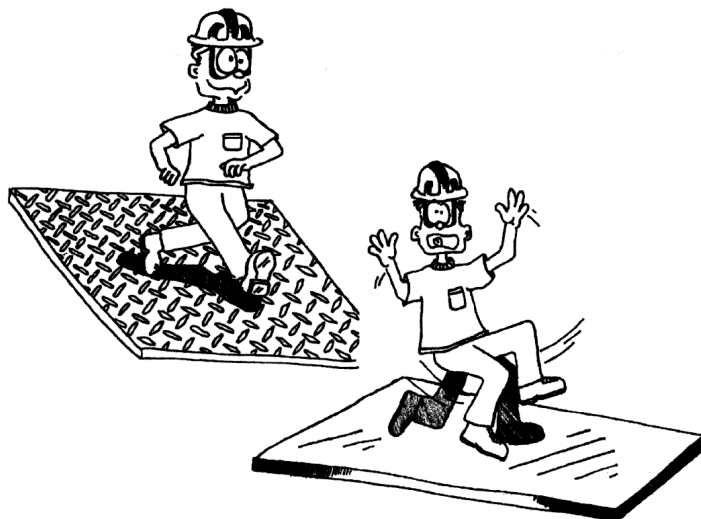


**AR MED Sheet and Plate** – This abrasion resisting product is medium carbon, high manganese, and has a Brinell Hardness typically in the range of 200/250. This material is produced primarily for use in the materials-handling industry such as sideboards and guides on conveyors, chutes, hoppers and mixer drums. Can be welded, machined, drilled, punched, and takes a moderate amount of forming and rolling.



### Aluminum Plates 3003-H14

Decimal	Size	WT / SQ FT	WT / Sheet
0.250	48 x 96	3.564	114.05
0.250	48 x 120	3.564	142.56



### Aluminum Sheet Color/Painted

#### White on White GPSH14

Decimal	Size	WT / SQ FT	WT / Sheet
0.040	48 x 96	0.585	18.72
0.040	48 x 120	0.585	23.40
0.040	49 x 144	0.585	28.66



#### White / Black Coat GPSH14BL

Decimal	Size	WT / SQ FT	WT / Sheet
0.040	48 x 96	0.585	18.72
0.040	48 X 144	0.585	28.08



#### Bronze GPSH14B

Decimal	Size	WT / SQ FT	WT / Sheet
0.040	48 X 96	0.585	18.72
0.040	48 X 120	0.585	23.40

## Aluminum Diamond Tread Plate



### 3003 H22 Bright Finish

Decimal	Size	WT / SQ FT	WT / Sheet
0.0625	48 X 96	1.009	32.29
0.1000	48 X 192	1.570	100.48
0.125	48 X 96	1.925	61.60
0.125	48 X 120	1.925	77.00
0.125	48 X 192	1.925	123.20
0.125	60 X 96	1.925	77.00
0.125	60 X 192	1.925	154.00
0.1875	48 X 96	2.823	90.34
0.1875	48 X 120	2.823	112.92
0.1875	48 X 192	2.823	180.67
0.1875	60 X 144	2.823	169.38
0.1875	60 X 192	2.823	225.84



### Aluminum Diamond Tread Plate

#### 6061 T6 Mill Finish

Decimal	Size	WT / SQ FT	WT / Sheet
0.250	48 x 96	3.669	117.41
0.250	48 x 192	3.669	234.82
0.250	60 x 96	3.669	146.76
0.250	60 x 192	3.669	293.52
0.375	48 x 96	5.443	174.18
0.375	48 x 192	5.443	348.35

## Heat-Treatable Alloys

**Grade 6061** – This is the most adaptable of the heat-treatable aluminum alloys. 6061 is mostly used for structural applications. It has the majority of the good properties of aluminum and it extends a wide span of mechanical characteristics and corrosion resistance. It is weldable by all methods. Some common uses are truck frames, boat trailers and machine parts. Conforms to ASTM-B209.